

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B66B 9/08	A1	(11) International Publication Number: WO 95/29867 (43) International Publication Date: 9 November 1995 (09.11.95)
(21) International Application Number: PCT/SE95/00480 (22) International Filing Date: 1 May 1995 (01.05.95) (30) Priority Data: 9401486-7 1 May 1994 (01.05.94) SE (71)(72) Applicant and Inventor: JOHANSSON, Bengt [SE/SE]; PI 215, Kyrkesund, S-440 60 Skärhamn (SE). (74) Agent: ERIKSSON, Hans; P.O. Box 50, S-641 21 Katrineholm (SE).		(81) Designated States: AT, AU, BG, BR, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KR, LT, LU, LV, MX, NO, NZ, PL, PT, RO, RU, SE, SI, SK, TJ, UA, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>

(54) Title: METHOD AND MEANS AT STAIR LIFTS

(57) Abstract

The present invention relates to a method to safely and comfortably run a stair lift with disabled people along a conveying system fitted onto a wall, and a device to run a stair lift to carry out said method. The invention is characterized in that an adjusting device (13) is activated in changing of elevation of the conveying system to shift the position of the stair lift (10, 11) in relation to the device (1) to run the stair lift in such a way that the stair lift essentially maintain a horizontal position.

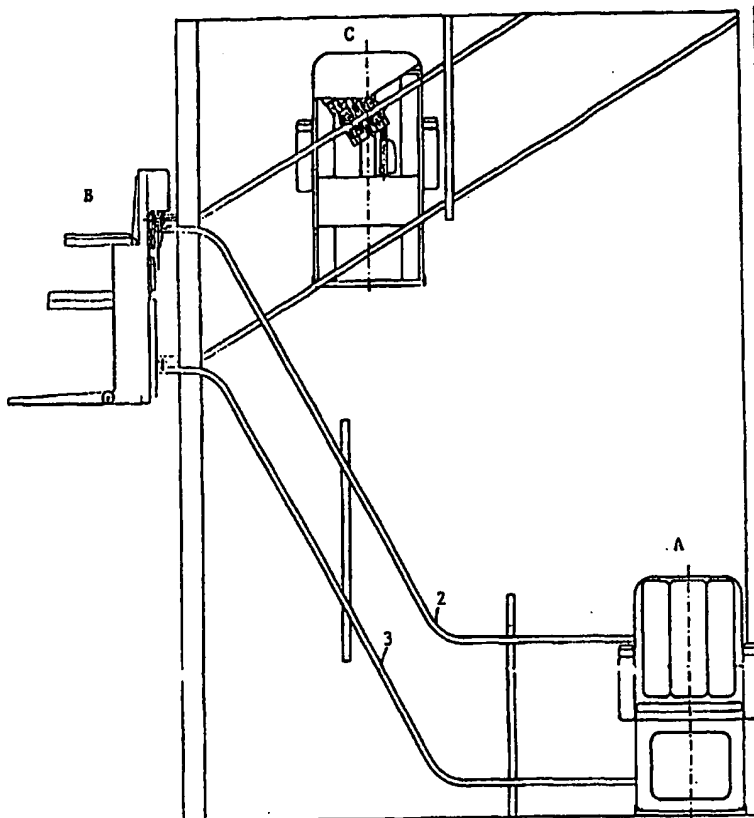

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Method and means at stair lifts

The present invention relates to a method to safely and comfortably run a stair lift for disabled people along a single conveying system fitted onto a wall, and a device to run a stair lift to carry out said method.

Background of the invention

There are many advantages both individually and to the society if disabled people can keep on living in a well known environment at home. Aid to move between different floors can be one condition for disabled people to keep on living and act in a wellknown environment. Hereby the possibilities to obtain a high quality in life is increased. This can be explained by the fact that the daily ususal routines once being automated in the brain can continue to work without too conscious efforts far up in the old age as long as the brains of the old people doesn't are exposed during a short period of time to too many new impressions (to a great pressure of information). This can happen when moving from the old housing to a home for the aged. Thus, the older people will then often be quite dependent upon external help. Neurophysiologically this can be explained by the fact that behaviour patterns in the brain being used to, which can work excellent in the old environment at home, does not often manage to adopt to new environments with many new impressions. There is a risk that the behaviour patterns collaps.

Prior art

To-day there is an established technique for wall mounted conveying systems for stair lifts. Preferably the stair lifts shall be able to pass over horisontal passages along the extension of stairs which is inclining, and through sharp curves. For this reason the most usual stair lifts have been made positively guided, and maybe driven along both upper and lower rails, normally included in the guiding system. Heretofore an exact parallellity must exist between these two rails, one monunted above the other at the wall along the stairs. Often this kind of guiding system involves a close measuring of the stairs itself in a coordinate system, and later to have a specific guiding system specially manufactured at the factory and

mounted onto the wall at the stairs with an absolute precision. This procedure is circumstantial and often involves several visits from mechanics and needs later adjusting to have the stair lift arrangement to function as expected. One example of such a stair lift is shown in WO 92/14673.

EP-A- 0143737 disclose a stair lift having two rails at different levels and where a guiding of the stair lift along both these rails require an exact adaption and installation of all the components forming part of the system.

DE-A-3 934 431 disclose a stair lift using just one supporting or guiding rail. A handle or a seat is movably arranged along the rail. At this device the problem with parallelity and positive drive of the lift between two guiding rails has been excluded. It is true that the device shown in this document is exemplary simple, but when carrying a sitting person along stairs this person will probably experience the trip as hazardous and instable. The center of gravity of the load and lifting device must always be directly under the suspension point.

The objects of the invention

The main object of the present invention is to obtain a technique with a great degree of safety to comfortably run a stair lift along a conveying system fitted onto a wall and which also can be arranged in curves at the same time as the stair itself is very steep. The technique includes both a method to run the stair lift and a driving device for the stair lift only engaging a single guiding system passing between different floors in a building.

Another object of the invention is to obtain a driving device for a stair lift with double driving motor devices to maintain the action also when one driving motor device is out of order.

Yet another object of the invention is to obtain a technique not requiring expensive and complicated measurement, special manufacturing and a later mounting of a guiding system, but instead use bent and calibrated pipe components being easily connected and mounted in place with special pressing tools without to great requirements onto insertion and exact adjustments of mainly upper and lower rails.

The objects mentioned above will be obtained by the invention having the characterizing clauses mentioned in the claims.

The invention

By positively control the platform of the stair lift to a horizontal position independently of changing in inclination of the guiding system along the stairs, the person carrying stair lift will be able to move smoothly and comfortably. Preferably the single guiding system comprises first upper rails onto which the driving device of the stair lift is run, and a second, lower supporting component, which in one embodiment of the invention can be arranged in direct connection to the upper rail and may be formed of a protruding flange portion integral with a pipe profile, towards which e.g. a rotably mounted roller runs onto the stair lift. By the positive control of the stair lift an inclination caused by mass forces and by the rolling/dragging contact towards a lower support of the stair lift will be prohibited.

Level indicators may be arranged along the guiding system to make a lowering of the speed of the platform, when arriving curves, or in changes of the inclination possible. This is done to avoid unpleasantly experienced acceleration and retardation forces.

By using a calibrated rail in the guiding system with a cross section as circular as possible and rollers in the driving device of the stair lift with corresponding part circular profiled surfaces engaging the rail a line contact between the rollers and the rail is established. An elastic layer at the engaging surfaces of the rollers and/or at the surface of the rail creates a greater engaging surface between rollers and rail. Furthermore the rollers are resiliently biased towards the rail. Under no circumstances the rollers can be brought so far from each other that there is a risk for the driving device of the stair lift to become loosened from or be out of contact with the rail.

By using two units of roller means in the driving device of the stair lift with two opposed rollers in each, wherein at least one of the units has one driving roller and a reaction roller, which units are connected by a hinge, the two rollers will by its line engagement with the rail, be mutually and positively guided onto this rail. Preferably the stair lift is carried by the forward roller unit onto a tap and is in alignment with a rotation axis of the upper roller in the forward roller unit - as seen when the stair lift is moving upwards.

The hinge connecting the two roller units is broken at passing the centre of the rail and is asymmetrically extending from one body portion external of the rail. By arranging the hinge pivotable in just one direction the stability will increase when passing straight portions of the guiding system. This is important when a not loaded lift, i.e. when the pressure between rollers and the rail is at a minimum. This transferring of a not loaded stair lift will often happen as several persons are using the one and same lift and a call for the lift by e.g. IR-transmitter may be done if the lift is not at the same floor as the person wanting to use it. This means that the lift device will be transferred without any load between the floors.

By having two driving means, one at each roller unit with one driving motor at each driving each driving roller, it is possible to ensure the action of the lift also if one driving device will fail. It is important that users of a stair lift of this kind are ensured that they don't risk to be sitting at the middle of the stairs without any possibility to move up or down. When there is an interruption in electricity supply it is possible to move down by a manual manipulation of the lift and/or by having a battery powered driving device, which means that the electricity supply to the shifting motor is ensured.

The driving means of the stair lift is also equipped with a separate falling latch, i.e. a device being released when the downward speed of the lift has exceeded a predetermined acceptable value. The falling latch will mechanically grip around the upper rail and will stop the lift in about 5 cm after exceeding said allowed speed. At steep portions of the guiding system the falling latch can be arranged to be activated and stop the lift in a distance of 2 - 3 cm.

Embodiments

The invention will now be described by way of example with reference to the accompanying drawings in which:

Fig. 1 is a diagrammatic part of a stair lift according to the present invention from the inside, i.e. seen from e.g. the wall of stairs, at a horizontal portion of the guiding system comprising lower and upper rails and with a horizontally set platform, e.g. for a wheel chair;

Fig. 2 is a side view as in fig. 1, but with the stair lift in an inclining part of the guiding system and with the platform still kept in a horizontal position;

Fig. 3 is a diagrammatic side view of a stair lift with a seat device for transport of a sitting person not using a wheel chair, wherein three different positions of the stair lift are shown along the guiding system;

Fig. 4 shows the back portion of the stair lift with a pivotally connected tandem driving device and the connection of a mechanical shifting device between the tandem driving device and the stair lift; and wherein

Fig. 5 shows a diagrammatic view from above of the tandem driving device and the stair lift running onto an essentially horizontally curve portion at an upper rail forming part of the guiding system, and where the driving devices are excluded for clarity.

Fig. 1 shows a diagrammatic side view from behind of a stair lift with a driving device 1 of the stair lift in the shape of a tandem drive device to bring a stair lift along a guiding system consisting of two rails 2 and 3. The tandem drive device has two motor driven roller units M1 and M2 with two driving rollers 4, 5 and two opposite reactive rollers 6, 7 in each unit. Preferably the transmissions between the motors and the driving rollers are by gears. The units M1 and M2 are connected by a "broken" hinge 8a, 8b, the longitudinal axis of which intersects the centre of the longitudinal axis of the guiding system.

The driving rollers 4, 5 are engaging around the upper rail 2 and one or several vertical roller means 9 at the stair lift bear on a lower pipe or supporting rail 3. The stair lift has a back 10 which carries a platform 11 at its lower portion. The stair lift 10, 11 is connected by a pivot 12 to the tandem driving device M1, M2 with drive and reactive rollers 5,7; 4,6, respectively. A mechanical shifting means 13 with a shifting motor 13a will turn the platform around the pivot 12 so that the platform always will be in a horizontal position. Thus a turning between the stair lift 10, 11 and

the tandem drive units M1 and M2 will occur. - See also fig. 2 and 4.
- It is important that the two driving wheels 4, 5 and reactive wheels 6, 7 at the tandem driving device M1, M2 will run at a smooth and even surface at the upper rail 2 to eliminate uncomfortably experienced shocks and vibrations. This decreases the risk of suddenly decreased contact surfaces between the driving rollers/reactive rollers and the rails, and also the risk of slipping.

The two driving units M1, M2 of the tandem driving device are interconnected by a "broken" hinge 8a, 8b. This arrangement enables for the stair lift to pass sharp corners during simultaneous inclinations in both the horizontal and the vertical planes. The leading driving unit M1 will always strive to be in a vertical plane as it is positively attached to the back of the platform, and the other driving unit M2 is inclined as much as necessary when entering and passing curves at the guiding system. This happens with a necessary pressure from the driving rollers and the reactive rollers.

In fig. 2 a side view according to fig. 1 is shown but with the stair lift at an inclining portion of the guiding system 2, 3 and with the stair lift 10, 11 in a set horizontal position during action from the shifting means 13 thus expanding and increasing the distance between the pivotal attachment of the shifting means at the driving device 1 and the stair lift 10, 11, i.e. the shifting means will perform a horizontal positive adjustment of the stair lift. The output to the shifting means 13 for shifting is obtained from angular sensors (angular transmitters - not shown) which may act according to the inertia principle. They shall be arranged at the stair lift. One alternative embodiment can have gyro means with a housing, wherein a pendulum will deviate when the stair lift is shifting from its horizontal position. The pendulum can be connected to transmitter means which can be semi protected (inductive or capacitive transmitters). Such transmitters are known and there are no difficulties for a man skilled in the art to choose and arrange one transmitters for this application.

Fig. 3 is a diagrammatic side view of a stair lift, here equipped with a seat instead of a platform carrying a wheel chair, i.e. for transport of a sitting person not using a wheel chair. The three positions A, B, C for the stair lift device is shown along the

guiding system 2, 3. This stair lift distinguishes from the one shown in fig. 1, 2 by having a seat instead of a platform. Here a sliding surface of a material with a low frictional coefficient, e.g. a plastic material such as TEFLON, can be used. This sliding surface can be combined with roller means. This means that the stair lift will bear on the lower rail 3 forming part of the guiding system and slide against this rail during its displacement up and down stairs.

In fig. 4 the back portion of the stair lift is shown pivotally connected - by the pivot 12 - to the tandem driving device M1,M2 and the attachment of the mechanical shifting means 13 between the tandem driving device and the stair lift 10, 11. Thus, with the variable lever Y existing by influence of the force N from the shifting device, said force will give rise to the shifting torque ($P \times Y$) Nm.

Fig. 5 shows a diagrammatic view from above of the driving rollers 4, 5 resp. of the tandem driving device M1,M2 running onto an almost horizontal curve portion at the upper rail 2 forming part of the guiding system. The driving motors are not shown to make the view clear. The stair lift 10, 11 is suspended in the tandem driving device by a pivot 12. Preferably this pivot is aligned with the rotation axis of the leading and upper driving roller 4. Here is also shown how the broken hinge 8 is asymmetrically arranged and passes through the centre of the rail. Hinge parts 14a and 14b with apertures are asymmetrically arranged and extend both above and below the rail 2.

The invention is not restricted to the shown and described embodiments, but modifications can be done within the scope of the following claims.

CLAIMS

1. Method to maintain a horizontal position of a stair lift (10,11) displaceable by a driving device (1) along a guiding system (2,3), characterized in that a shifting means (13) is activated in changing of elevation of the conveying system to shift the position of the stair lift (10, 11) in relation to the device (1) to essentially maintain the stair lift in a horizontal position.

2. Method according to claim 1, characterized in that a level sensor at the stair lift (10,11) records a tendency to shift said device and give an output to the shifting device (13) to restore the position of the stair lift (10,11).

3. Method according to claim 1 and 2, characterized in that rollers (4,5,6,7) at the driving device of the stair lift are resiliently biased towards the guiding system (2).

4. A driving device (1) of a stair lift to bring the stair lift (10,11) along a guiding system (2,3) and to perform the method according to claim 1, characterized in two roller units (M1,M2) with two opposite rollers (4,6; 5,7) at each, wherein at least one unit is engaged to the guiding system (2).

5. Device according to claim 4, characterized in that the roller units (M1,M2) are connected by a hinge (8).

6. Device according to claim 5, characterized in that the hinge (8) is broken in such a way that it is divided into two parts (8a, 8b), one part (8a) above and one part (8b) below the guiding system (2), and is pivotable in just one direction.

7. Device according to claim 4, characterized in that each roller (4,6; 5,7) has a partially cylindrical tread, and that the guiding system (2) has an upper calibrated rail (2), in the periphery of which the partially cylindrical treads are engaged.

8. Device according to any of the claims 4 to 7, characterized in that the contacting surfaces of at least the driving roller (rollers) (4; 5) engaging the guiding system (2) has a friction increasing resilient layer.

9. Device according to claims 4 - 6, characterized in that the driving or reactive rollers (4,6; 5,7) bear against the guiding system (2) biased by a spring force.

10. Device according to claim 4, characterized in that the stair lift (10,11) has a level sensor connected to a mechanical shifting device (13).

Fig. 1

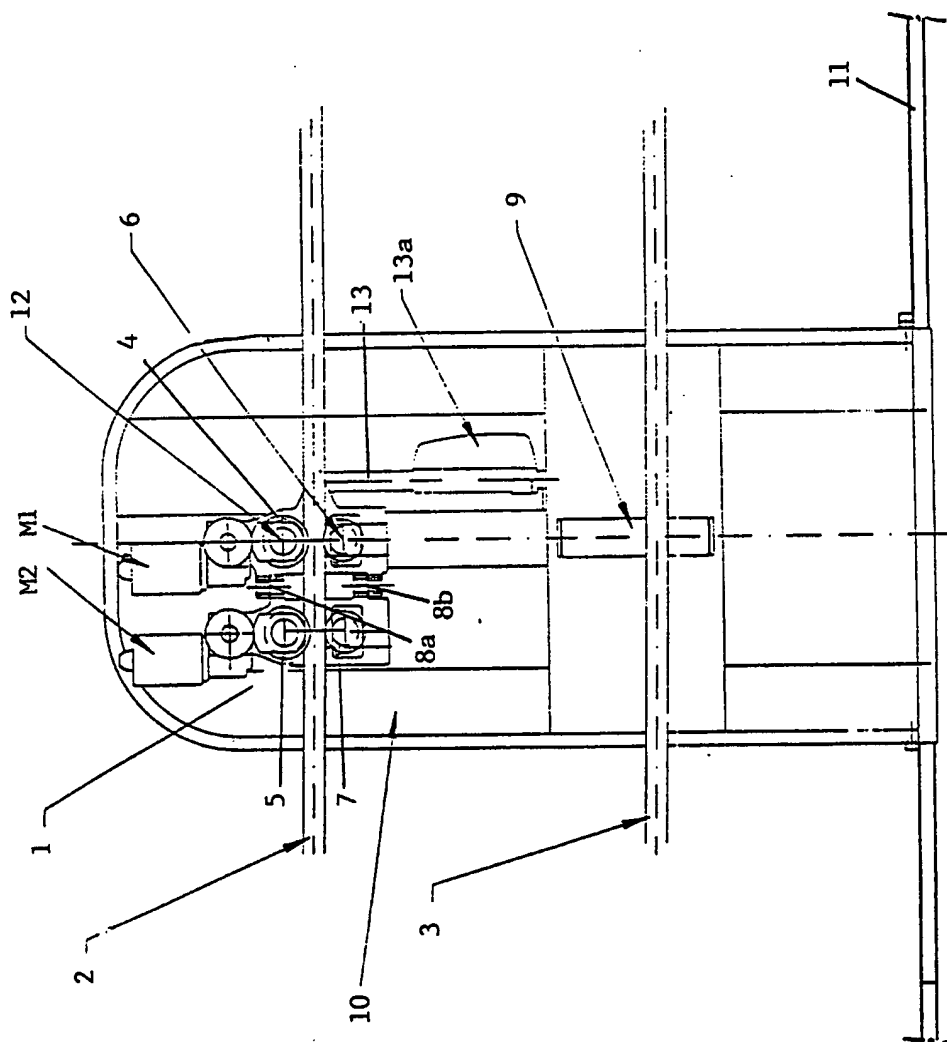
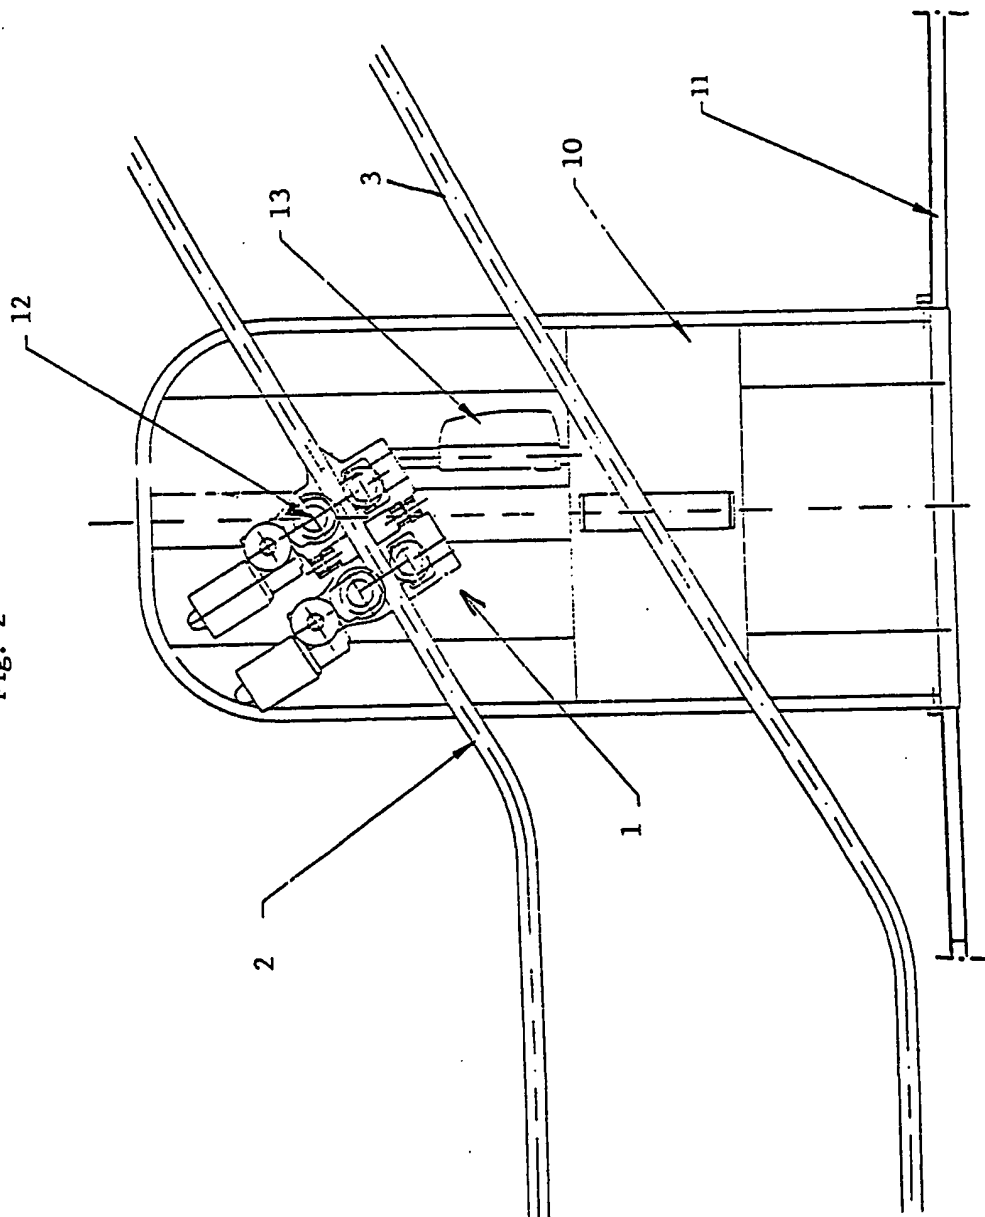


Fig. 2



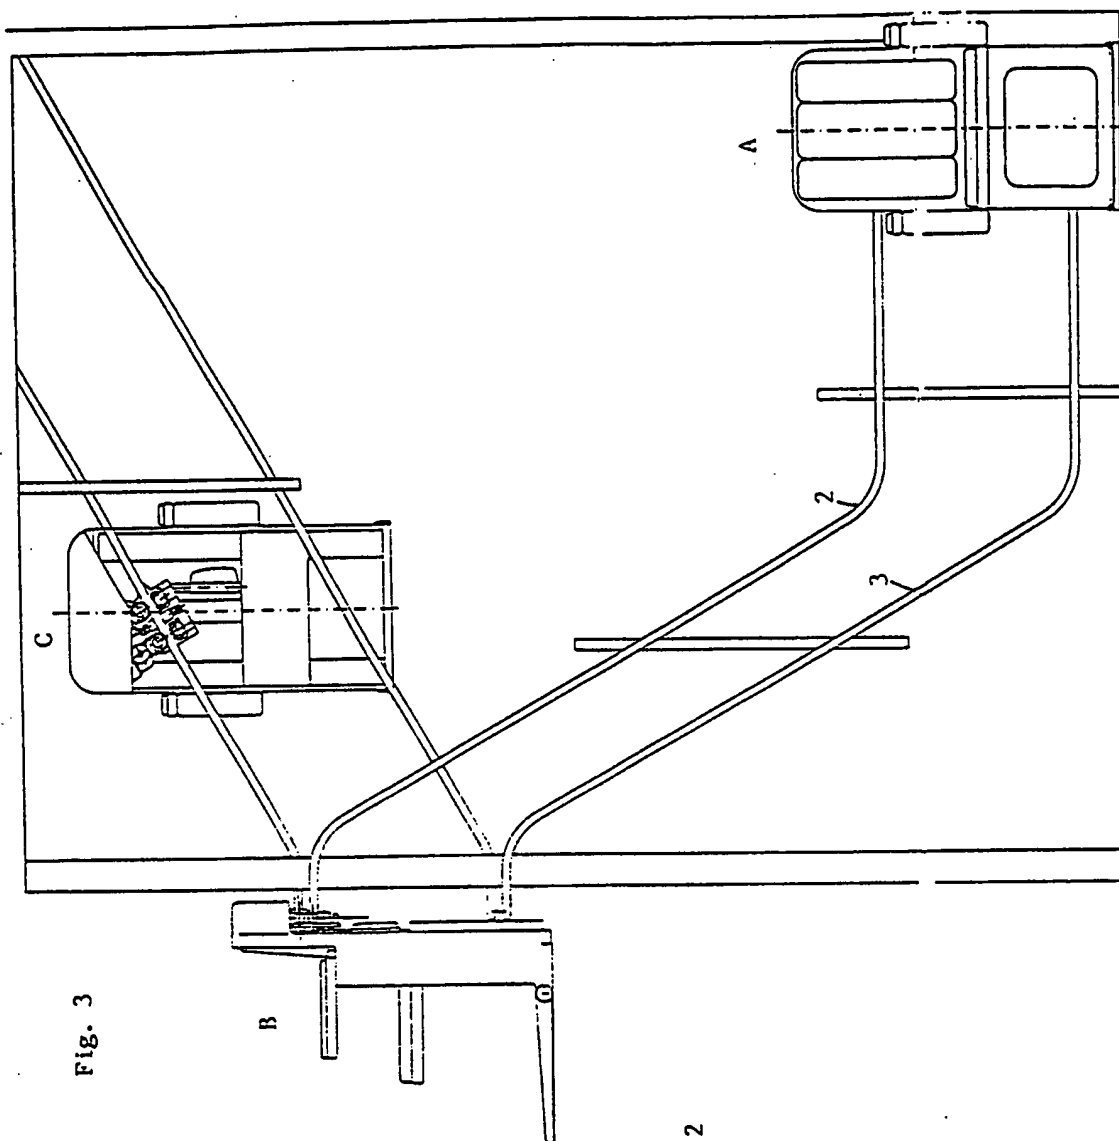


Fig. 3


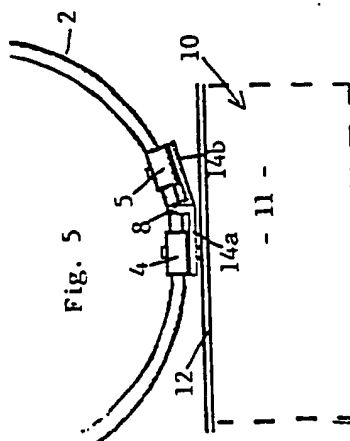


Fig. 5

Fig. 4

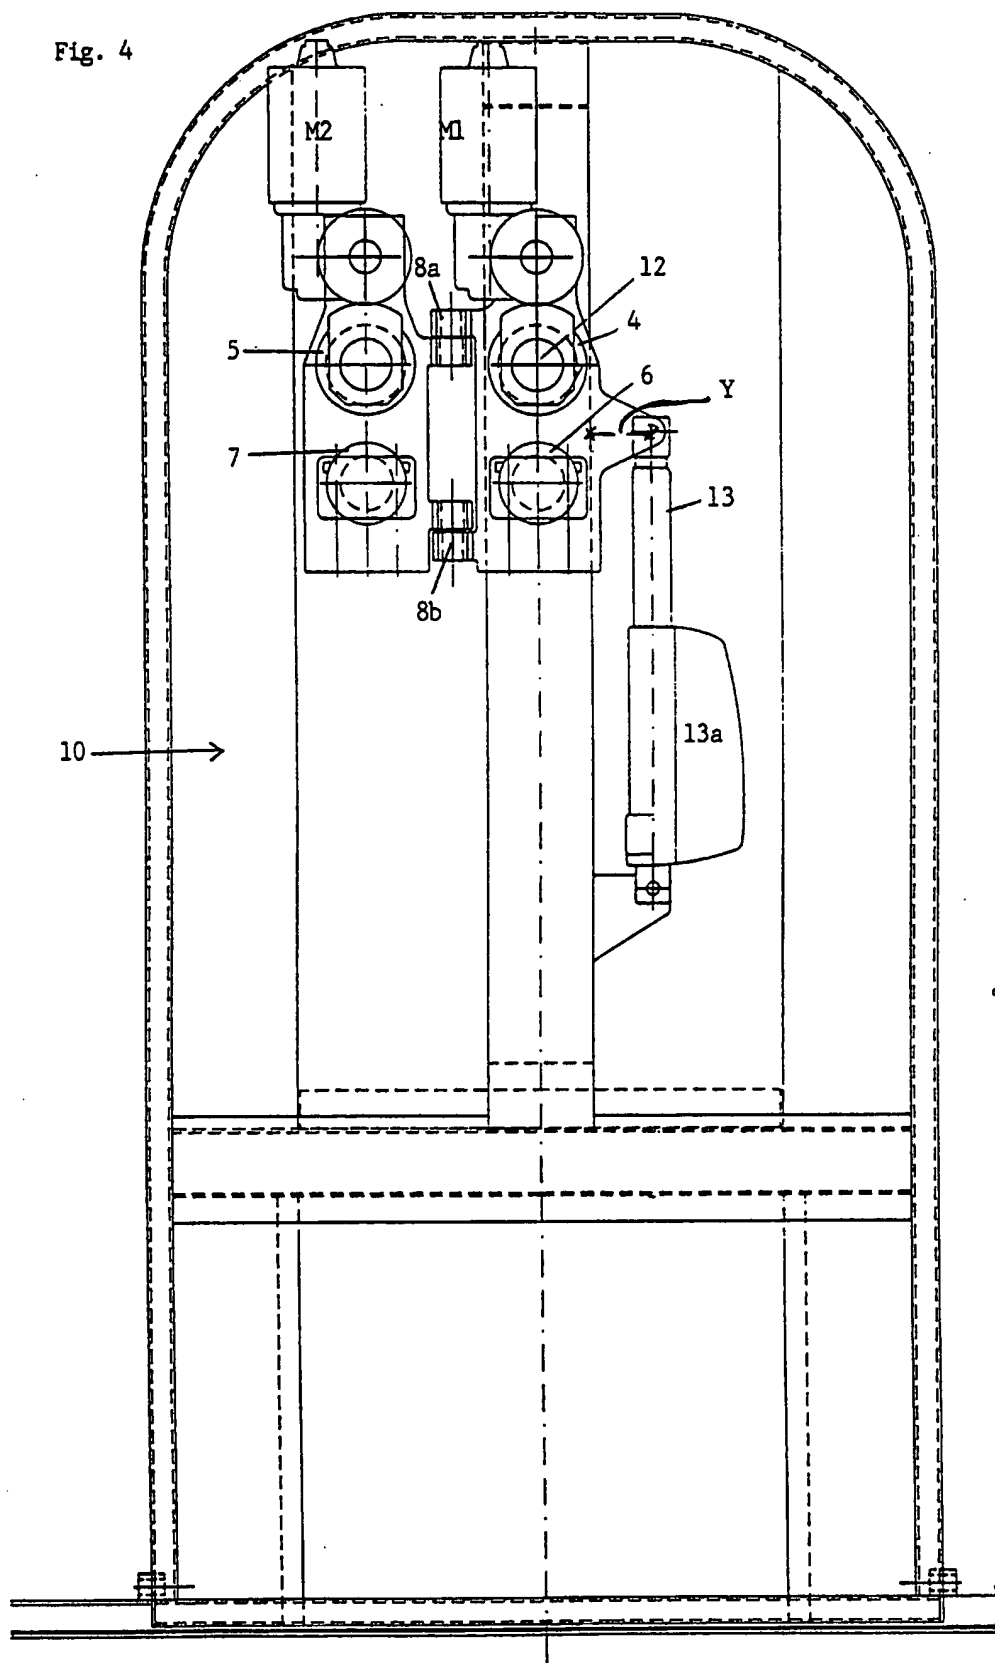

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00480

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: B66B 9/08 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: B66B, B65G, B61B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0143737 A1 (RIGERT, CESAR), 5 June 1985 (05.06.85), page 5, line 24 - page 6, line 10	4,7-9
Y	---	5-6
Y	FR 1420817 (M. GIOVANNI MANDELLI), 2 November 1965 (02.11.65), page 2, line 38 - line 44, detail 12 in figures 3 and 8	5-6
A	EP 0560433 A1 (LIFTENFABRIEK BRINKMAN JAN HAMER B.V.), 15 Sept 1993 (15.09.93), column 2, line 43 - line 45; column 3, line 1 - line 5, figure 2	1-3,10

<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
4 August 1995		22 -08- 1995
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Mariana Eddin Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 95/00480

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 778091 (SHEPARD ELEVATOR COMPANY), 3 July 1957 (03.07.57), page 1, line 28 - line 40; page 4, line 55 - line 67 -- -----	1-3, 10

INTERNATIONAL SEARCH REPORT

Information on patent family members

10/07/95

International application No.

PCT/SE 95/00480

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A1- 0143737	05/06/85	DE-A- 3334476	11/04/85
FR- - 1420817	02/11/65	NONE	
EP-A1- 0560433	15/09/93	NL-A- 9200437	01/10/93
GB- - 778091	03/07/57	NONE	